

## TECHNICAL BULLETIN

**TO: ELEVATE CONTRACTORS  
ELEVATE DISTRIBUTORS  
ELEVATE SALES REPRESENTATIVES**

**October 2022**

### **RE: COLD WEATHER APPLICATION GUIDELINES 2022-2023**

Cold temperatures change the physical properties of adhesives, sealants, primers, and coatings, and alter the handling characteristics of roofing membranes due to increased rigidity. The information in this bulletin is intended to help installers successfully apply Elevate materials in cold weather. Holcim recommends cold weather application procedures be used when ambient and substrate conditions fall below 40 °F (4 °C). Refer to applicable Technical Information Sheets (TIS) for specific storage and application recommendations.

### **ADHESIVES, SEALANTS, AND PRIMERS**

#### **STORAGE**

- Store all adhesives, sealants, and primers between 60 °F (16 °C) and 80 °F (27 °C) to ensure proper mixing and dispensing of the products, and to promote appropriate application rates.
- If the properties and application characteristics of the materials begin to change during cold weather application, restore them to room temperature. Materials stored below 60 °F (16 °C) must be brought to room temperature, thoroughly mixed, and examined to verify proper consistency (no marbling or separation of components) prior to application. **NOTE: Never mix EPDM Solvent-Free Bonding Adhesive.**

#### **MIXING & DISPENSING**

When liquid materials are cold, their viscosity increases which may cause solvents and solids to separate. This separation can make mixing and dispensing difficult. To minimize the potential for materials cooling on the roof before application, follow these additional guidelines:

- Only bring materials from warm storage to the roof 1 to 4 hours prior to application, or as necessary to ensure materials are close to 60 °F (16 °C) when dispensed.
- Always thoroughly mix adhesives, primers, and coatings to a smooth, uniform state before and during use. Follow mixing instructions provided with each product. Do not use mixing equipment that could generate a spark, which could ignite flammable material.
- In extreme conditions, it may be necessary during application to rotate material between a hot box or warm storage area and the roof to maintain the appropriate application temperature.

#### **APPLICATION**

- Drying times depend on ambient conditions. Cool and overcast conditions lengthen open times (or “tack times”), while sunny and dry conditions shorten open times. Expect and plan for longer open times in cold weather prior to adhering insulation or membrane.
- Do not apply water-based products when freezing temperatures are expected within 24 hours<sup>1</sup> after application and do not apply solvent-free products when freezing temperatures are expected within 12 hours after application.

---

<sup>1</sup> Within 48 hours for Elevate PVC Water Based Bonding Adhesive. See below.

### APPLICATION CONTINUED

- Blisters may occur when membranes are installed using solvent-based adhesives or primers that have not sufficiently dried. During cold temperatures, a false reading may be given if a “touch-push” test is not performed properly. Be sure to conduct “touch-push” tests in areas with the heaviest application of adhesive or primer, using a clean finger and adequate pressure to verify solvents have flashed-off. Additionally, some products’ readiness may not be verified by a “touch-push” test but should be determined instead by the specific open times for those products. Refer to the Elevate website for current TIS and application instructions for each product.
- Follow all local air quality management requirements when installing products containing Volatile Organic Compounds (VOCs).

### SOLVENT EVAPORATION RATES

The table below shows various flash-off times associated with solvent components of Elevate adhesives, sealants, and primers. Products may contain one or more of the solvents listed below. Because the ratios of solvents in each product vary, a definitive flash-off time for each product cannot be assigned. Reference the specific product’s Safety Data Sheet (SDS) for chemical components and compare that information to the table below for an indication of relative flash-off efficiency. Ambient conditions will affect flash-off times, but the effects are proportional.

Solvent	VOC Exemption	Evaporation Rate*	Relative Flash-off
Water	VOC Exempt	0.3	Extremely Slow
PCBTF	VOC Exempt	0.9	Slow
Naphtha	Not VOC Exempt	1.4	Medium
Toluene	Not VOC Exempt	2.2	Medium
TBAc	VOC Exempt (except for applicable CA Air Quality Districts)	2.8	Medium
Acetone	VOC Exempt	5.6	Fast
Hexane	Not VOC Exempt	8.3	Extremely Fast


\*The standard reference for Evaporation Rate is n-butyl acetate with an evaporation rate of 1.0.

### ADHESIVE “BLUSHING” (CONDENSATION)

- Blushing occurs when the evaporative cooling of the material during dry time lowers the surface temperature at or below the dew point, resulting in condensation on adhesive and primer films. This condensation prevents proper adhesion. Discontinue application immediately if blushing occurs.
- The use of adhesives and primers should be closely monitored for blushing when the ambient temperature is close to the dew point. The gap between the ambient temperature and the dew point is typically narrower in early morning and late afternoon, so midday is often the optimal time to use adhesives and primers when applying Elevate products in cold weather conditions. Greater exposure to sunlight at any time of day decreases the risk of blushing.

### EPDM SOLVENT-FREE BONDING ADHESIVE (SFBA)

- Store containers of SFBA at temperatures between 60 °F and 80 °F (16 °C and 27 °C) until ready for use. **DO NOT allow product to freeze.**
- Only use SFBA when ambient and substrate temperatures exceed 40 °F (4 °C). If SFBA is exposed to temperatures below 40 °F (4 °C), restore to room temperature before use. Do not use when temperatures are expected to fall below freezing within 12 hours after application.
- **Do not mix or agitate SFBA prior to installation.** Remove any skin coat that may develop in the container to expose fresh adhesive for application.
- Conduct “touch-push” tests in areas with the heaviest application of SFBA and use adequate pressure to verify that sufficient open time has occurred to initiate curing of the adhesive. Compared to standard EPDM Bonding Adhesive, SFBA should be slightly easier to push with the finger when it is ready to bond to the membrane.
- **Although SFBA does not contain solvents, the adhesive must achieve its optimal open time to set up prior to bonding to the roofing membrane.** See chart below for the approximate open times for SFBA when the ambient relative humidity and temperature are known.

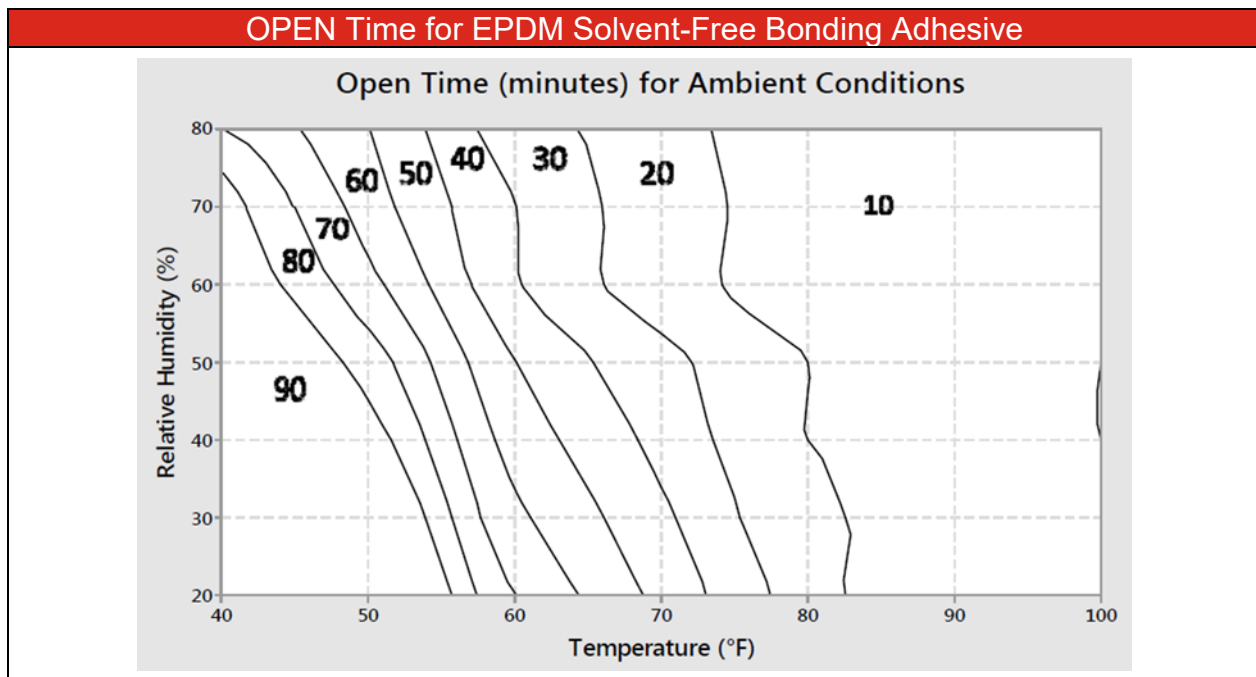

### I.S.O.STICK™ INSULATION ADHESIVE (WINTER GRADE)

- Consider using I.S.O.Stick Insulation Adhesive (Winter Grade) in lieu of other insulation adhesives during cold weather if the project specification permits. The Winter Grade formula may be used when ambient and substrate temperatures range from 25 °F to 65 °F (-3 °C to 18 °C).
- Storage requirements are 60 °F to 80 °F (16 °C to 27 °C).

## **ELEVATE PVC and ELEVATE PVC KEE ADHESIVES**

- Adhesive and sealant consistencies thicken as the temperature drops. To minimize this consequence:
  - Complete test areas to determine whether conditions will cause problems such as condensation with the application of the materials.
  - Discontinue application when material becomes too thick to apply properly.
  - If using Elevate PVC Water Based Bonding Adhesive, ambient and substrate temperatures must be at least 50 °F (10 °C) and rising during application and remain at this temperature for 48 hours after application. Expect longer drying times during lower temperatures or higher humidity.
  - Jet Bond PVC Spray Adhesive **(TO BE USED WITH ELEVATE PVC (NON-FLEECE) MEMBRANE ONLY)** can be used at 35 °F (1.67 °C) and rising. See Technical Information Sheets (TIS) for additional information about application and storage instructions.

## **APPLICATION OF ROOFING MEMBRANES AND FLASHINGS**

### **MEMBRANE PREPARATION**

- Store roofing membranes in a clean, dry location out of direct sunlight, and away from sources of punctures or other physical damage.
- Prior to installation, unroll membranes and allow them to relax for a minimum of 30 minutes.
- During cold weather, folded membrane panels become more difficult to relax and install, especially with adhered systems. The use of no-fold panels in cold weather is highly recommended.

### **ULTRAPLY™ TPO, ELEVATE PVC and ELEVATE PVC KEE INSTALLATION**

- Thermoplastic membranes become more rigid in cold temperatures. To help membranes relax, early on the day of installation, remove the outer wrapping and leave the roll in the sunlight as long as possible. This will enable the darker bottom ply of the membrane to absorb as much heat as possible and increase the membrane's flexibility.
- To ensure seams are properly welded, it is critical that test welds are completed:
  - At daily start-up
  - When ambient conditions change
  - When welding stops for a significant period of time (e.g., lunch breaks)
- When using a hand welder, test welds should be performed on scrap membrane or unsupported flashing material to ensure the operator is using the proper technique and temperature setting.

### **JET BOND SPRAY ADHESIVE**

- Jet Bond Spray Adhesive should be stored to maintain the desired product temperature of 70 °F (21 °C).
- Apply only when substrate and ambient temperatures are 25 °F (-4 °C) and rising.
- Do not apply when wind speeds are 15 mph or higher.

### **I.S.O. TWIN PACK™ and I.S.O. SPRAY™ R**

- I.S.O. Twin Pack and I.S.O. Spray R should be stored to maintain the desired product temperature between 60 °F (16 °C) and 80 °F (27 °C).
- Apply I.S.O. Twin Pack only when substrate and ambient temperatures are 20 °F (-7 °C) and rising.
- Apply I.S.O. SPRAY R only when substrate and ambient temperatures are 25 °F (-4 °C) and rising.
- Do not attempt application during unfavorable conditions.

### **FULLFORCE™ EPDM and ULTRAPLY TPO SA INSTALLATION**

- FullForce EPDM and UltraPly TPO SA membranes utilize Elevate's Secure Bond™ technology to adhere to various horizontal roofing and vertical wall substrates.
- Store FullForce EPDM and TPO SA in a clean, dry location, and keep dry prior to installation.
- FullForce EPDM and TPO SA may be installed when ambient and substrate temperatures exceed 20 °F (-7 °C).
- Always observe cold weather guidelines when applying primers.

### **INVISIWELD™ APPLICATIONS (ULTRAPLY TPO, ELEVATE PVC, and ELEVATE PVC KEE)**

- The minimum safe application temperature for induction welding of Elevate thermoplastic membranes to InvisiWeld or InvisiWeld-S plates is 0 °F (-18 °C).
- Before induction welding with the appropriate tool, ensure there is no moisture or condensation present on the top surface of the plate or on the bottom surface of the roofing membrane. Moisture will affect the ability of the induction tool to weld and may result in partial or incomplete welds.
- Always follow the induction tool manufacturer's guidelines for calibration and use of the tool in cold temperatures. In general, the tool must be calibrated regularly, in real time, **ON-SITE**, using materials (membrane and plates) in the same temperature conditions as the jobsite materials.

### **RUBBERGARD™ EPDM FLASHING INSTALLATION**

- Uncured EPDM flashing products (both standard and EcoWhite™ EPDM) are designed to be formable, but cold weather may require supplemental warming by using a heat gun during application.
- Care should be taken to keep heat guns away from cleaners, primers, adhesives, or other flammable materials.
- Ambient conditions (sunlight, wind, and temperature) and flashing color will determine the need for supplemental heat. Typically, temperatures below 60 °F (16 °C) may require the use of additional heat to ensure the formability of uncured flashing products.

### **SBS, APP, and BUR INSTALLATION**

- Store SBS and APP modified bitumen rolls and BUR ply felts between 50 °F and 100 °F (10 °C and 38 °C) and install when ambient and substrate temperatures are 40 °F (4 °C) and rising. Attempting to install asphalt-based products below 40 °F (4 °C) can reduce adhesion, resulting in delaminating or blistering during subsequent heating cycles.
- Materials must be used within 4 hours of removal from a heated storage area. Materials that are not used within 4 hours must be returned to a heated storage area until they return to a temperature within 50 °F to 100 °F (10 °C and 38 °C), which typically takes 24 hours.
- Hot Asphalt
  - Cold substrates can rapidly cool mopped asphalt. Asphalt cools and thickens more quickly at low temperatures, which may cause application rates to be less uniform.
  - All handling equipment should be insulated to minimize drops in asphalt temperature prior to application.
  - **Asphalt temperature shall be within the published equiviscous temperature (EVT) but not less than 420 °F (216 °C) and must be maintained at the point of application of the roofing membrane).**
  - Mop lead should be no more than five (5) feet (1.5 m) from the roll.
  - Roll cap sheets into hot asphalt using positive pressure, ensuring proper side and end lap width.
  - Stop the operation and/or change to another container when asphalt temperature at the point of application cannot be maintained within the published EVT.
  - Never overheat asphalt to compensate for cold weather conditions and never heat asphalt above its EVT or its flash point. Always remain within the asphalt manufacturer's approved application range, but never below 420 °F (216 °C).
  - Always follow OSHA and NRCA safety regulations.

### **MULTI-PURPOSE MB COLD ADHESIVE AND FLASHING CEMENT**

- Store Multi-Purpose MB Cold Adhesive and Multi-Purpose MB Flashing Cement between 60 °F to 80 °F (16 °C and 27 °C) in their original, unopened containers.
- Multi-Purpose MB Cold Adhesive is best applied during cold weather by use of a heated spray rig. Squeegee-applied Cold Adhesive is not recommended during cold weather. Ambient and substrate temperatures should be 40 °F (4 °C) and rising at the time of application.
- Elevate Multi-Purpose MB Flashing Cement should only be used when ambient and substrate temperatures are greater than 40 °F (4 °C) and rising.

### **AC FAST FR PMMA LIQUID-APPLIED FLASHING**

- Elevate AC Fast FR PMMA should be stored between 65 °F to 70 °F (18 °C to 21 °C) in a controlled environment to facilitate mixing and fleece saturation. DO NOT store materials outside in cold weather as the cooled materials will be difficult to mix and apply due to their thick consistency.
- Do not attempt to mix or apply unless ambient and substrate temperatures are at least 35 °F (2 °C) and rising, and materials have been properly stored until just prior to use. The required quantity of AC Catalyst Powder and cure times are dependent upon the ambient temperature. Follow mixing instructions closely.

## **BARRIERS AND UNDERLAYMENTS**

### **VAPOR BARRIERS**


- V-Force™ Vapor Barrier Membrane may be applied when substrate and ambient temperatures are 25 °F (-4 °C) or higher provided the V-Force has been stored between 50 °F and 100 °F (10 °C and 38 °C) prior to application. Refer to the intended primer's Technical Information Sheet for application instructions and limitations, if applicable.

### **UNDERLAYMENTS**

- Underlayments should be stored out of the weather in a clean, dry area in original, unopened packaging.
- CLAD-GARD™ R has a minimum temperature of 40 °F (4 °C) at the time of application.
- CLAD-GARD SA has a minimum temperature of 40 °F (4 °C) or 50 °F (10 °C) at the time of application, depending on region (North or South).

For further information or assistance, please contact Holcim Technical Services at 800-428-4511, or visit the Elevate website at [www.holcimelevate.com](http://www.holcimelevate.com).

Sincerely,



Ben George  
Manager, Technical Solutions